



KABA[®]

Easy Time Recording - B-Net 93 20 Terminal


With its appealing design, combined with ease of use, the B-Net 93 20 is the ideal terminal for your start into time recording. All standard features such as IN, OUT, official absence, balance query and special functions are covered by its five function keys with colored icons.

B-Net 93 20 – The Features

- Graphic, transfective LCD display with a resolution of 240 x 40 pixels for the display of time data and information.
- 5 function keys are available. These keys have colored symbols for In, Out, official absence, balance query, and special functions.
- Time-controlled switch of function keys can be individually programmed per day.
- In/Out plausibility checks avoid erroneous bookings.
- Mailbox function to provide employees with one-time information.
- Easy adaptation to collection processes through parameter setting.
- Storage for over 200 master records and 4,000 booking records.
- Contact-free data collection via LEGIC reader.
- Other readers such as inductive, magstripe, Mifare, Hitag, HID, etc. are also available.
- Data retention in case of power failure and automated restart.
- Operation in online, offline, and autonomous modes.
- Standard 10/100 Mbps Ethernet interface.
- IP 30 / IP 54 protection class (depending on type of reader).
- Three-point locking mechanism to ensure a tight sealing of the device.
- Ambient temperature 0°C to +55°C.
- Compatibility with the Bedas and Bedanet Terminal Series and thus protection of your investment.
- Manufactured according to DIN EN ISO 9001 : 2000 quality standard.
- Reader keyboard for alphanumeric data input. This allows for convenient list selection, e.g. for official absence or cost center change via navigation keys.
- Access control function
 - Time authorization plausibility checks.
 - Two relays and four digital inputs, e.g. for monitoring of a door.
- Heater for outdoor installation
Temperature range - 25°C to + 55°C according to environmental class III.

Optional:

- RS 485 host interface.
- Memory configuration I
1,000 master records and 4,000 booking records.
- Memory configuration II
2,000 master records and 8,000 booking records or 3,500 master records and 3,000 booking records adjustable.
- External, uninterruptible power supply (UPS - for up to four hours operating time under typical conditions).

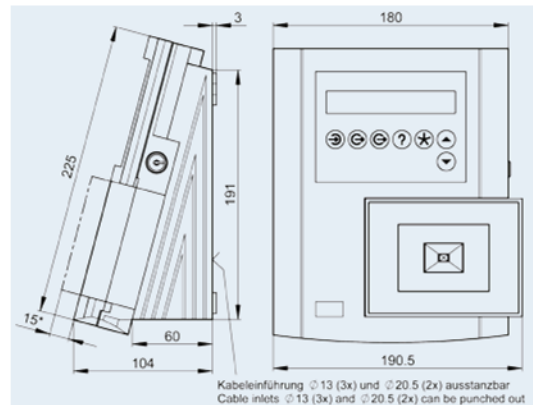

Detailed dimensional drawings are available for downloading on our homepage.

Subject to technical changes without notice!
Order no. 04036777, Issue P/0906

Kaba GmbH
Albertstraße 3
78056 Villingen-Schwenningen
Germany
Phone +49 7720 603-0
Fax +49 7720 603-102

www.kaba.com

KABA®