



KABA[®]

Technology, Functionality, and Design – B-Net 95 80


We set new standards for process optimization, information flow and transparency in your company with our multi-function terminal B-Net 95 80. This gives you a competitive edge and helps you to keep pace in today's rapidly changing market-place.

B-Net 95 80 – The Features

- Appealing design, ease-of-use with user selectable languages.
- Brilliant 12.1" TFT display with a resolution of 800 x 600 pixels for light-flooded rooms.
- High quality, resistive 5-wire touch-screen for industrial applications that can be easily operated with work gloves.
- Worldwide applicable through internal supply unit with longrange 100 - 250 V AC.
- Up to two integrated readers for data collection, e.g. LEGIC reader and barcode swipe reader.
- WEPOS operating system.
- 128 MB RAM.
- Four digital outputs, e.g. to show machine downtimes.
- Four digital inputs that can also be used as 16bit counters.
- Ethernet interface 10/100 Mbps autosensing.
- Flexible for any application, either own applications can be used or a Kaba terminal application.
- RS 232 interface with a 9-pin D-sub connector for free use.
- Four freely available USB 2.0 interfaces (USB 1.1 in connection with VIA Eden CPU) for individual extensions such as barcode CCD hand scanner.
- PS/2 interface.
- Two CompactFlash slots.
- VGA port to connect a second monitor.
- Audio connection internal (Line-Out, Line-In, and MIC).
- Passive cooling without fan.
- Hard disk with min. 30 GB.
- IP 54 protection class.
- Ambient temperature 0°C to + 40°C.
- Manufactured according to DIN EN ISO 9001 : 2000 quality standard.

Optional:

- Select from two high-performance CPUs
 - 1 GHz VIA Eden
 - 1.1 GHz Intel Pentium M
- Max. 1 GB RAM (512 MB in connection with VIA Eden CPU).
- 1024 x 768 pixels resolution.
- IrDA interface as an alternative to RS 232.
- Water-proof and dust-proof according to IP 65 protection class.
- Available terminal applications
 - B-Client PDC5 for shop floor data collection
 - B-Client HR5 for time recording
 - B-Client Kiosk5 software platform

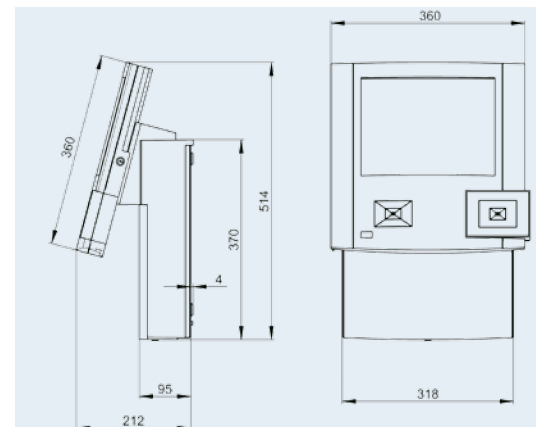

Detailed dimensional drawings are available for downloading on our homepage.

Subject to technical changes without notice!
Order no. 04036775, Issue P/0906

Kaba GmbH
Albertstraße 3
78056 Villingen-Schwenningen
Germany
Phone +49 7720 603-0
Fax +49 7720 603-102

www.kaba.com

KABA®