



KABA®

Bedanet 91 05 – Subterminal for Access Control

Due to its compact construction, the Bedanet 91 05 can be installed in a standard 55 mm flush-mounted box. The subterminal is delivered either with the LEGIC or Mifare contact-free identification medium. An illuminated PIN code keyboard is also available.

Bedanet 91 05 – The Features

The Bedanet 91 05 subterminal is equipped with a two-colored LED and a beeper for optical and acoustical operator guidance. The Bedanet 91 05 can be connected to the Bedanet 92 20 S control, the Bedanet 92 90 access manager, or to the Bedanet 93 60 time recording terminal as an access reader. In these superior units, which are installed in vandal-secured environments, the badge contents are checked, interpreted, and evaluated. Based on this evaluation, the subterminal either opens the door or keeps it closed to prevent the user from entering.

The Bedanet 91 05 subterminal stores a configurable list of customer numbers in memory. The subterminal can check up to five different segment numbers. This number check runs standalone in the Bedanet 91 05. The subterminal also has a relay to activate doors and gates.

Manufactured according to DIN EN ISO 9001 : 2000 quality standard.


Technical Specifications

- Operating voltage 12 - 27 V AC or 16 -32 V DC
- Reader
 - LEGIC
 - Mifare
- Environmental temperature -25° C to 70° C
- Power consumption 24 V at 100 mA max.
- Relay contact load 30 V AC/DC, max. 2 A
- Signal transmitter LED (red, green) and buzzer
- Interface RS-485, galvanically isolated
- Protection class IP 54

- Programmable segment number list
- Simple standalone function
- Door monitoring
 - frame contact
 - door-opener push button
- Sabotage contact
- Standard colors are anthracite and grey-aluminum

Optional:

- PIN keyboard with background illumination (not in connection with Mifare or door intercom systems)
- Distance frame for surface mounting
- Integration into Siedle BM 611 modules

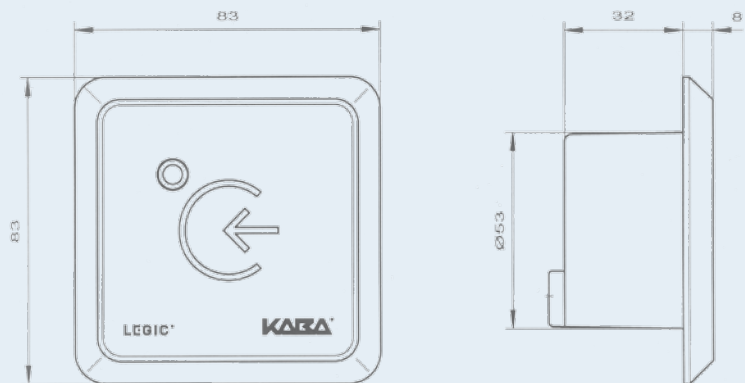

Detailed dimensional drawings are available for downloading on our homepage.

Subject to technical changes without notice! Order no. 04035954, Issue St/0906

Kaba GmbH
Albertstraße 3
78056 Villingen-Schwenningen
Germany
Phone +49 7720 603-0
Fax +49 7720 603-102

www.kaba.com

KABA®